



The construction of Savatech multi-size long plugs PLUGY DC ensures efficient sealing of both connection and the main pipe at the same time. Savatech PLUGY DC are equipped with a 100 cm long supply hose.



Special inflation sequence

Sealing of main and lateral pipes simultaneously

Equipped with inflation hose

PLUGY DC 75-100  
60074



Start of inflation process


ACCESSORIES



INFLATION HOSE, FI 6 MM,  
2 M, 0.2 KG  
78904




INFLATION HOSE FI 6 MM,  
5 M, 0.5 KG  
78905




HAND PUMP, 0.8 KG  
60010

## HANDLING

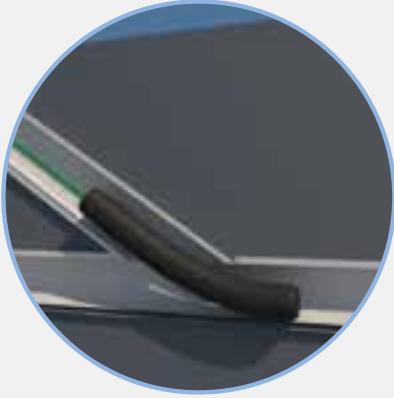

INSERT THE PLUG IN THE MIDDLE OF A CONNECTION

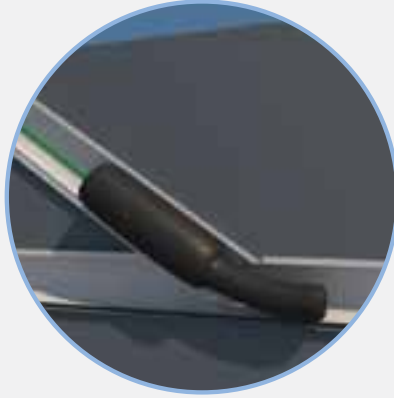

IN THE FIRST PHASE, THE UPPER PLUG PART IS INFLATED TO PREVENT LIQUID SPILLS



IN THE SECOND PHASE, THE REMAINING PART OF THE PLUG IS INFLATED TO COMPLETELY STOP THE FLOW

## PLUGY DC - BLOCKING PLUGS

PART NUMBER	NOMINAL SIZE	SIZE USAGE RANGE		REQUIRED INFLATION PRESSURE (BAR)	DEFLATED PLUG		PRODUCT LENGHT (MM)	PRODUCT WEIGHT (KG)	EYE BOLT	
		MIN. DIA. (MM)	MAX. DIA. (MM)		DIAMETER (MM)	BODY LENGTH (MM)			M THREAD	INFLATION VALVE THREAD SIZE
60073	50-75	50	75	2.5	40	490	550	0.7	NA	TR 15
60074	75-100	75	100	2.5	60	550	610	1.2	NA	TR 15
60075	100-150	100	150	2.5	80	750	810	1.8	NA	TR 15
60076	150	150	150	2.5	100	730	790	2.6	NA	TR 15

## BACK PRESSURES (bar)\* - PLUGY DC

PLUG SIZE	PIPE DIAMETER (MM)			
	50	75	100	150
50-75	2.2	2		
75-100		2.1	1.9	
100-150			2	1.8
150				1.9

\* measured in a dry iron pipe